


IP67



06

- SY Series IP67
- Bayonet coupling

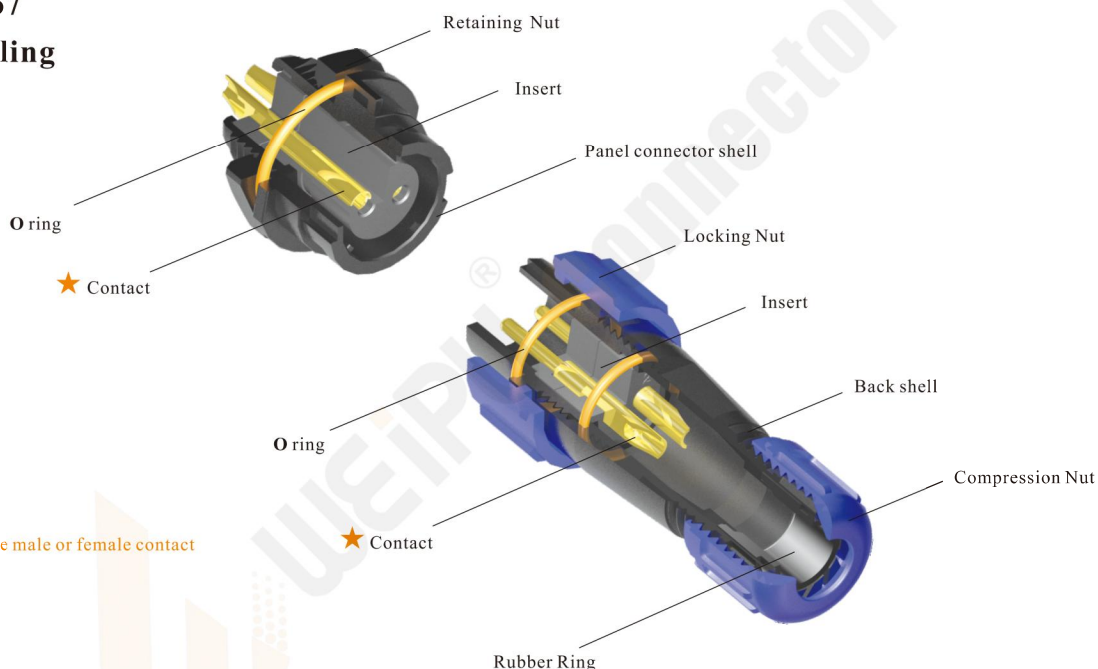

Material and spec

Coupling	Bayonet
Shell material	PC, Nylon66, fire resistance: V-0
Insert material	PPS, max temperature 260 °C
Contact material	Brass with gold plating
Termination	Solder: SY11, SY13, SY17, SY21, SY25, SY29 Crimp: SY17, SY21, SY25, SY29 Screw: SY21, SY25, SY29 (Ø2.5, Ø3, Ø3.5mm contact)
Cable outer diameter range	SY11: I:3-4mm, II:4-6.5mm SY17: 6-10mm SY25: I:10-14mm, II: 7-12mm SY13: I: 4-6.5mm, II: 5-8mm SY21: I: 4.5-7mm, II:7-12mm III:5-9mm SY29: I:9-13mm, II:13-16mm
IP rating	IP67
Mating cycle	500
Temperature range	-40°C~+85°C; -20°C~+70°C
Insulation resistance	2000 MΩ

SY25 Series




SY25



Plug with RJ45 adapter
Mate with SY2511, SY2511C,
SY2512, SY2513, SY2515

SY2510/PRJ45

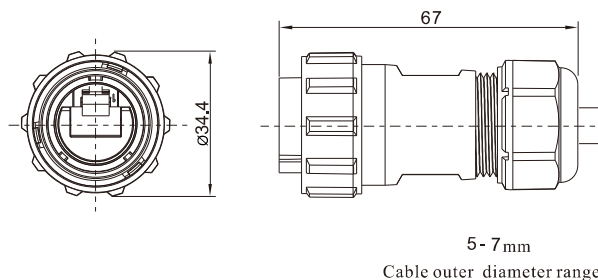


★ Wire length can be customized



Rreceptacle with RJ45 adapter C
Mate with SY2510

SY2511C/SRJ45

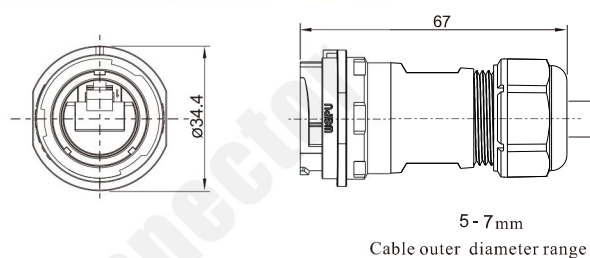


★ Wire length can be customized




Rear-nut mount receptacle
with RJ45 adapter
Mate with SY2510

SY2512/SRJ45

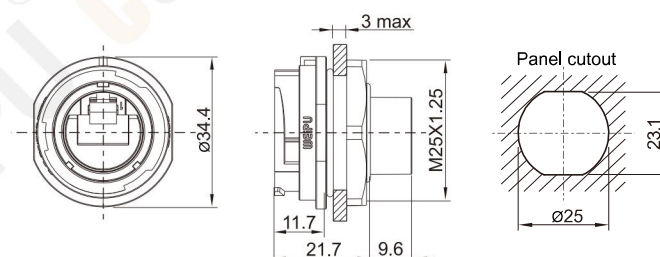

2-hole flange
with RJ45 adapter
Mate with SY2510

SY2513/SRJ45

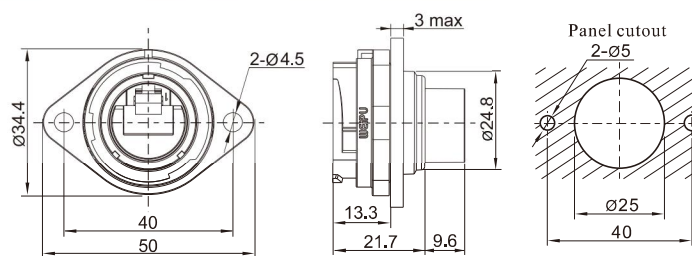

Front-nut mount
with RJ45 adapter
Mate with SY2510

SY2515/SRJ45

