


3

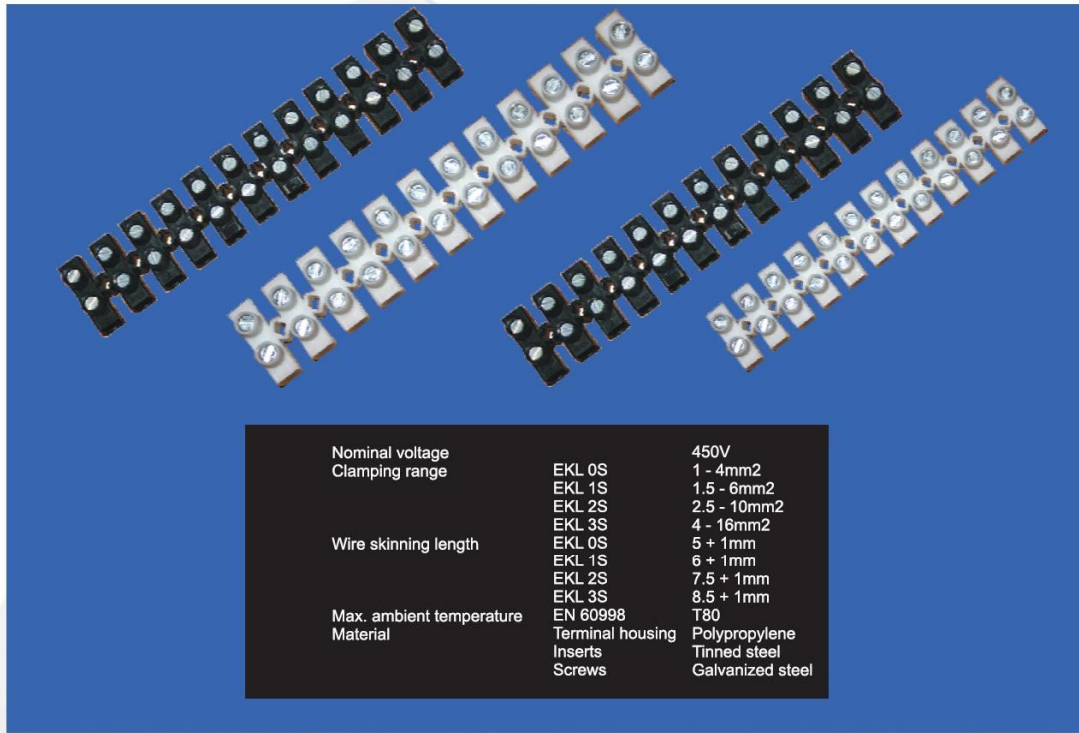

Nominal voltage	EKL 0S	450V
Clamping range	EKL 1S	1 - 4mm <sup>2</sup>
	EKL 2S	1.5 - 6mm <sup>2</sup>
	EKL 3S	2.5 - 10mm <sup>2</sup>
	EKL 4S	4 - 16mm <sup>2</sup>
Wire skinning length	EKL 0S	5 + 1mm
	EKL 1S	6 + 1mm
	EKL 2S	7.5 + 1mm
	EKL 3S	8.5 + 1mm
Max. ambient temperature	EN 60998	T80
Material	Terminal housing	Polypropylene
	Inserts	Tinned steel
	Screws	Galvanized steel

EKL...S	Ways	Colour	Waco Code	Packing	Amps	W	H	D	Mounting Holes
EKL 0 S	12	White	V1BCONEKL0S/WHT	50 x 10	3	94.9	13	16.6	2.65
EKL 0 S	12	Black	V1BCONEKL0S/BLK	50 x 10	3	94.9	13	16.6	2.65
EKL 1 S	12	White	V1BCONEKL1S/WHT	25 x 10	6	116.5	14.9	18.9	3.4
EKL 1 S	12	Black	V1BCONEKL1S/BLK	25 x 10	6	116.5	14.9	18.9	3.4
EKL 2 S	12	White	V1BCONEKL2S/WHT	25 x 10	16	133.8	17.3	23.4	3.7
EKL 2 S	12	Black	V1BCONEKL2S/BLK	25 x 10	16	133.8	17.3	23.4	3.7
EKL 3 S	12	White	V1BCONEKL3S/WHT	10 x 10	32	174.5	20.7	25	4.9
EKL 3 S	12	Black	V1BCONEKL3S/BLK	10 x 10	32	174.5	20.7	25	4.9
EKL 4 B	12	Black	V1BCONEKL4BE/BLK	10 x 5	63	187.3	28	30	

**ALSO** available in **HI-HEAT** (White only)  
Full range as above



Neutral Bar Brass

CODE	DESCRIPTION	PACKING
V1BNEUTRALBAR/DBLE	1m Double Brass	
V1BNEUTRALBAR/SNGL	1m Single Brass	
V1BNEUTRALBAR/SUPP	Universal Support	

