



DC BRUSH GEARED MOTOR

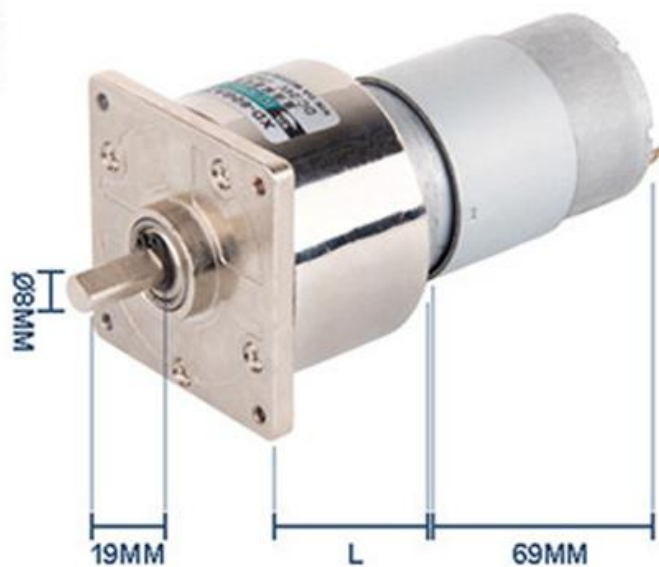

- AVAILABLE IN 12 OR 24VDC
- AVAILABLE FROM 5 TO 600RPM
- RATED 35W
- STEEL GEARS
- VARIABLE SPEED DRIVES AVAILABLE

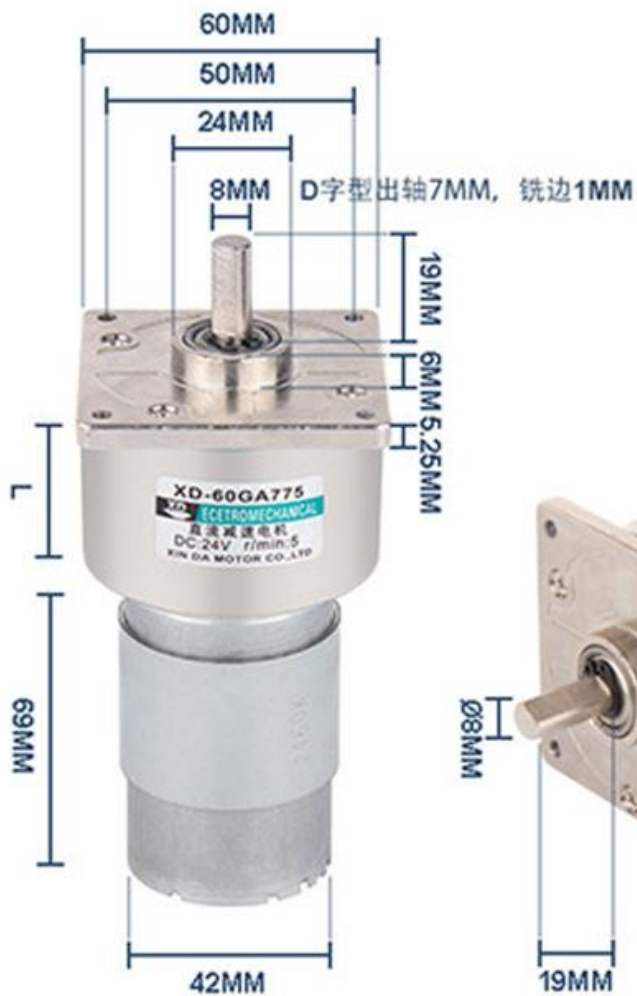

电压 (DCV)	空载转速 (R/MIN)	空载电流 (A)	负载转速 (R/MIN)	负载力矩 (KGF.CM)	负载电流 (A)	输出功率 (W)	输入功率 (W)	减速箱长度 (L: MM)
12	5±10%	3.27	4	261.03	3.51	11.1	42.03	40
	10±10%	1.07	8	142.1	3.12	11.7	37.3	40
	20±10%	1.54	16	34.24	1.87	5.6	22.4	40
	30±10%	0.92	24	30.64	1.75	7.9	21.0	36
	50±10%	1.46	40	30.78	2.81	12.9	33.7	36
	100±10%	1.22	80	8.00	1.54	6.1	18.6	36
	150±10%	1.93	120	16.88	3.95	21.6	47.1	33.5
	200±10%	2.20	160	3.79	2.22	6.1	26.6	33.5
	300±10%	1.89	180	5.09	2.05	9.5	24.6	33.5
	500±10%	3.88	400	5.53	4.57	23.4	54.7	28.5
	600±10%	4.16	472	3.76	4.36	18.2	52.1	28.5
24	5.5±10%	0.82	5	211.10	1.51	10.5	36.4	40
	10±10%	0.53	8	198.34	2.01	15.4	48.4	40
	20±10%	0.77	16	92.49	1.47	15.0	35.4	40
	30±10%	0.48	24	50.36	1.20	12.6	28.9	36
	50±10%	0.75	40	48.16	1.83	19.7	43.9	36
	100±10%	1.02	80	24.03	1.99	19.4	48.1	36
	150±10%	1.06	121	21.87	2.71	28.7	65.1	33.5
	200±10%	1.25	160	18.63	2.57	30.5	62.1	33.5
	300±10%	1.06	204	7.06	1.58	14.8	38.3	33.5
	500±10%	2.15	401	10.60	4.01	43.6	96.8	28.5
	600±10%	2.17	485	8.21	3.68	41.0	88.9	28.5
	800±10%	3.04	640	6.90	3.72	44.4	89.8	28.5

粉末冶金齿轮电机参数

电压 (DCV)	空载转速 (R/MIN)	空载电流 (A)	负载转速 (R/MIN)	负载力矩 (KGF.CM)	负载电流 (A)	输出功率 (W)	输入功率 (W)	减速箱长度 (L: MM)
24	6±10%	0.38	5.3	101.65	0.75	5.5	18.2	40
	10±10%	0.44	9.5	123.06	1.29	12.0	31.3	40
	20±10%	0.57	16	116.85	1.81	19.3	43.7	40
	30±10%	0.22	24	44.75	1.11	11.3	26.9	36
	50±10%	0.61	40	57.75	2.25	24.2	54.2	36
	100±10%	0.62	80	21.88	1.74	17.8	41.9	36
	150±10%	0.83	121	24.82	2.81	30.9	67.9	33.5
	200±10%	0.90	160	22.77	3.08	37.2	74.4	33.5
	300±10%	0.81	240	5.02	1.06	12.3	25.7	33.5
	500±10%	1.54	400	11.9	3.92	49.1	94.6	28.5
	600±10%	1.57	480	4.23	1.86	25.2	45.0	28.5