# **MORNSUN®**

#### Active high precision signal conditioning module



### FEATURES

- Four-port isolation (signal input, signal output, power input and power output terminals are all isolated from each other)
- High accuracy of 0.1% Full Scale
- Isolation test voltage 2.5kVDC (60s)
- Low temperature coefficient 50PPM/°C
- Industrial grade operating temperature from -40  $^\circ C$  to +85  $^\circ C$
- Low ripple & noise 30mVp-p
- ESD protection to IEC/EN61000-4-2, Contact ±4kV with performance Criteria B

TxxxP series signal conditioning modules (also called isolated transmitter), are analog signal conversion modules with incoming current/voltage signal input which is transformed into isolated current/voltage signal output. With an embedded high-efficient micro-power supply, the product self-supplies power to the internal signal processing circuit and inputs isolated power to the preceding-stage transducer at the same time. The electromagnetism isolation technology of the product ensures that input/output/power supply/power distribution path are all isolated from each other, meaning these products can completely replace traditional linear optocoupler isolators, providing much higher accuracy and extremely low temperature drift in comparison to optocouplers. The TxxxXP series are widely used in PLC, DCS, MCU and other isolated signal conversion applications.

ertification	Part No.	Power Supply input Typ. (VDC)	Input Signal	Output Signal	Isolation Power Output (VDC)
	T1130P	24V	4-20mA	4-20mA	None
	T1133P	24V	4-20mA	4-20mA	24V
	T1430P	24V	4-20mA	1-5V	None
	T1433P	24V	4-20mA	1-5V	24V
	T1450P	12V	4-20mA	1-5V	None
	T1530P	24V	4-20mA	0-10V	None
	T1533P	24V	4-20mA	0-10V	24V
	T1630P	24V	4-20mA	0-5V	None
	T1633P	24V	4-20mA	0-5V	24V
	T1650P	12V	4-20mA	0-5V	None
	T1S33P-2.5	24V	4-20mA	0-2.5V	24V
	T1S55P-2.5	12V	4-20mA	0-2.5V	12V
	T2230P	24V	0-20mA	0-20mA	None
	T2233P	24V	0-20mA	0-20mA	24V
	T2633P	24V	0-20mA	0-5V	24V
	T2650P	12V	0-20mA	0-5V	None
	T4130P	24V	1-5V	4-20mA	None
	T4630P	24V	1-5V	0-5V	None
	T5130P	24V	0-10V	4-20mA	None
	T5133P	24V	0-10V	4-20mA	24V
	T5150P	12V	0-10V	4-20mA	None
	T5153P	12V	0-10V	4-20mA	24V
05	T5230P	24V	0-10V	0-20mA	None
CE	T5530P	24V	0-10V	0-10V	None
	T5533P	24V	0-10V	0-10V	24V
	T5535P	24V	0-10V	0-10V	12V
	T5544P	15V	0-10V	0-10V	15V
	T5550P	12V	0-10V	0-10V	None
	T5555P	12V	0-10V	0-10V	12V
	T5630P	24V	0-10V	0-5V	None

**MORNSUN**<sup>®</sup>

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

#### 2018.11.22-B/3

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

### Signal conditioning modules TxxxxP Series

# **MORNSUN®**

T5650P	12V	0-10V	0-5V	None
T5660P	5V	0-10V	0-5V	None
T6130P	24V	0-5V	4-20mA	None
T6150P	12V	0-5V	4-20mA	None
T6230P	24V	0-5V	0-20mA	None
T6233P	24V	0-5V	0-20mA	24V
T6235P	24V	0-5V	0-20mA	12V
T6250P	12V	0-5V	0-20mA	None
T6530P	24V	0-5V	0-10V	None
T6560P	5V	0-5V	0-10V	None
T6630P	24V	0-5V	0-5V	None
T6640P	15V	0-5V	0-5V	None
T6650P	12V	0-5V	0-5V	None
T6S36P-2.5	24V	0-5V	0-2.5V	5V
T6S60P-3	5V	0-5V	0-3V	None

Notes: Customization of products is available on request.

Input Spec	cifications					
Item		Operating Conditions	Min.	Тур.	Max.	Unit
Power Input	Input voltage		Typ5%	Typ.	Typ.+5%	VDC
	Input power	Isolation signal power at full load			2.0	W
	Power supply protection		Input reverse polarity protection			
Signal Input	Input signal		See selection guide			
	Incut increasing	In case of max. input of current signal			250	mV
	Input impedance	In case of max. input of voltage signal	10			<b>Μ</b> Ω
		In case of current signal input			50	mA
	Over range	In case of voltage signal input			30	V

Output Spe	ecifications					
Item		Operating Conditions	Min.	Typ.	Max.	Unit
lsolation Power Output	Output voltage	Isolated power output at full load	Тур10%	Тур.	Typ.+10%	VDC
	Output current				25	mA
	Short circuit protection	<b>Τα=25</b> ℃	Continuous short-circuit protection (except 24V input part)			
	Output signal		See selection guide			
Signal Output	Load capacity	In case of max. input of voltage signal	2			KΩ
	Load capacity	In case of max. input of current signal			500	Ω
	Ripple & Noise	20MHz Bandwidth		30		mVp-p

Transmission Specification	IS				
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Signal Precision	<b>Ta=25</b> ℃	-0.1% FS		+0.1% FS	
Power Regulation	Power supply input Typ. ±5%	-0.05% FS		+0.05% FS	
Load Regulation	Change from no-load to full load	-0.05% FS		+0.05% FS	
Temperature Coefficient	Operating temperature from $-40^{\circ}$ C to $+85^{\circ}$ C			50	<b>PPM/</b> ℃
Band Width		2			KHz
Response Time				1	ms

**MORNSUN®** 

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2018.11.22-B/3

Page 2 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

## Signal conditioning modules

TxxxxP Series

# **MORNSUN®**

General Specifications					
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Electric Isolation		Four-port isolation (signal input, signal output, powe input and isolation power output are all isolated from each other)			
Isolation Voltage	Electric Strength Test for 1 minute with a leakage current <1mA, humidity <70%	2.5			kVDC
Isolation Resistance	500VDC	100			MΩ
Operating Temperature		-40		+85	°C
Transportation and Storage Temperature		-40		+85	°C
Case Temperature Rise	<b>Ta=25</b> ℃			30	°C
Application Environment		The presence of dust and corrosive gas may cause damage to the product			

Mechanical Specifications		
Case Material	Black plastic, flame-retardant and heat-resistant	
Package	DIP24	
Weight	11.5g(Тур.)	
Cooling Method	Free air convection	

Electro	Electromagnetic Compatibility (EMC)						
	ESD	IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B			
	сст	IEC/EN61000-4-4	Power supply port ±2kV (see Fig. 2 for recommended circuit)	perf. Criteria B			
Immunity EFT Surge	CFI	IEC/EN61000-4-4	Other ports ±1kV (see Fig. 2 for recommended circuit)	perf. Criteria B			
	Surgo	IEC/EN61000-4-5	Power supply port $\pm 1kV$ (see Fig. 2 for recommended circuit)	perf. Criteria B			
	Surge	IEC/EN61000-4-5	Other ports $\pm 1kV$ (line to ground) (see Fig. 2 for recommended circuit)	perf. Criteria B			

#### **Application Precautions**

- 1. Carefully read and follow the instructions before use; contact our technical support if you have any question;
- 2. Do not use the product in hazardous areas;
- 3. Use only DC power supply source for this product. 220V AC power supply is prohibited;
- 4. It is strictly forbidden to disassemble the product privately in order to avoid product failure or malfunction.

#### After-sales service


- 1. Factory inspection and quality control are strictly enforced before shipping any product; please contact your local representative or our technical support if you experience any abnormal operation or possible failure of the module;
- 2. The products have a 3-year warranty period, from the date of shipment. The product will be repaired or exchanged free of charge within the warranty period for any quality problem that occurs under normal use.

#### Applied circuit

Please refer to Isolated Transmitter application notes.

#### **Design Reference**

1. Wiring diagram for product application

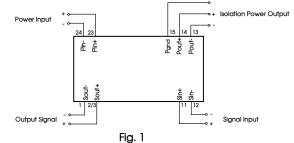

- Notes: 1) For modules with no isolation power output, Pin no. 13, 14 and 15 are not connected (NC).
- ② For the isolated bi-polar power modules, Pin 13 (Pout-) is isolated negative power output, Pin 14 (Pout+) is isolated positive power output and Pin 15 is reference ground.
- (3) For isolation single power modules, Pin 13 (Pout-) is the isolated negative power output, Pin 14 (Pout+) is the isolation positive power output and Pin 15 is NC.



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.



Recommended part

SMCJ30A

SMBJ15A

SMBJ15A

SMBJ15A

SMBJ28A

SMBJ15A 2Ω/1W

220uF/35V

Component

TVS1

TVS2

TVS3

TVS4


TVS5

TVS6

R

С

#### 2. EMC compliance recommended circuit

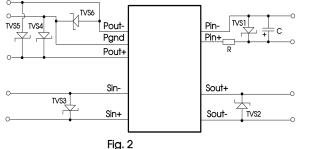


Notes : (1) Part T2633P must have resistance R connected at Pin+, all other parts do not need the R.

② For the isolated bi-polar power modules, Pin 13 (Pout-) is isolated negative power output, Pin 14 (Pout+) is isolated positive power output and Pin 15 is reference ground.

③ For isolation single power modules, Pin 13 (Pout-) is the isolated negative power output, Pin 14 (Pout+) is the isolation positive power output and Pin 15 is NC, therefore NO need for TVS4 and TVS6.

#### 3. For more information please find the application notes on www.mornsun-power.com

#### Dimensions and Recommended Layout

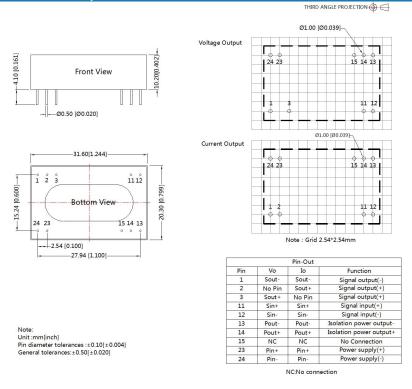

#### Notes:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. The Packaging bag number: 58240012;
- 2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 3. All index testing methods in this datasheet are based on company corporate standards;
- 4. The above are the performance indicators of the product models listed in this datasheet. Some indicators of non-standard models will exceed the above requirements. For details, please contact our technical staff;
- 5. We can provide product customization service;
- 6. Products are related to laws and regulations: see "Features" and "EMC";
- 7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

### Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: sales@mornsun.cn

MORNSUN <sup>®</sup>	
----------------------	--

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2018.11.22-B/3 Page 4 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation