

Tel: (909)596-6298
Fax: (888)HO-CHIEN

HO CHIEN ELECTRONIC GROUP, INC.

COMPONENT PROFESSIONALS

2152 Series 0.050" Center Header Socket

Material:

Contact: Phosphor Bronze

Contact Plating: Gold over 0.000100" Nickel Underplating

Solder Tail Plating: 0.000150" Tin over 0.000100" Nickel Underplating

Insulator: Polyester, rated UL94V-O

Insulator Color: Black

Mating Connector: [2512 Series](#)

Electrical:

Current Rating: 1 Amp Max.


Contact Resistance: 30 Milliohms. Max.

Insulation Resistance: 5000 Megohms Min. DC 250V

Dielectric Strength: 500V AC


Operation Temperature: -40°C to +105°C

Max Processing Temp: 230°C for 30 to 60 seconds
260 °C for 10 seconds

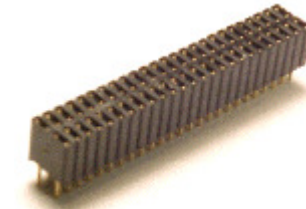

Ordering Part Number

2152 -	□	□□	□	- □
Series Number	Number of Rows	Number of Total Positions	Body Heigh	Contact Plating
	D: Dual S: Single	4.6mm: [4 to 100 pos.] 8.5mm: [4 to 35 pos.]	Blank: 4.6mm H: 8.5mm	Blank: Gold Flash F: 10u" Gold E: 15u" Gold D: 30u" Gold

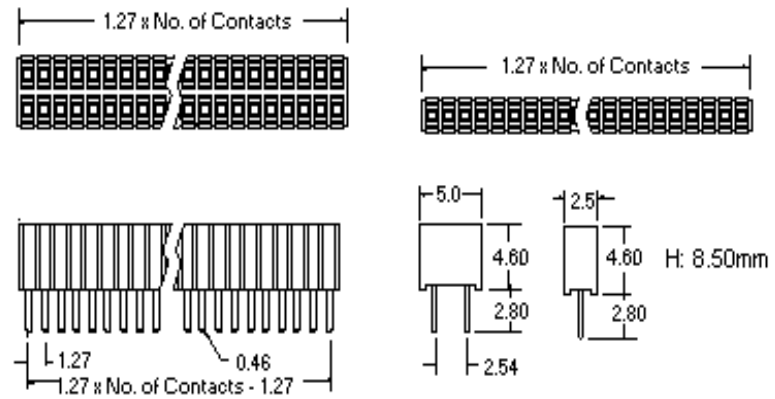

| [Main Menu](#) | [On-line catalog](#) | [Local Rep](#) | [Distribution](#) |

| [News](#) | [Company](#) | [Request Form](#) | [E-Mail](#) |

Copyright © 1995-2012 Ho Chien Electronic Group, Inc. All rights reserved.