

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications



DIN EN 60 664-1
DIN EN 61 984

Inserts

- 01. Number of contacts :10+PE
- 02. Rated Current :16A
- 03. Rated Voltage :250V
- 04. Pollution degree :3
- 05. Rated impulse voltage :4kv¹⁰
- 06. Insulation resistance :≥10Ω
- 07. Material:Polycarbonate
- 08. Colour:RAL 7032(light grey)
- 09. Rated voltage acc. to UL/CSA:600V
- 10. Limiting temperatures : -40℃~+125℃
- 11. Flammability acc. to UL94:V0
- 12. Mechanical working life (mating cycles) :≥500

Contacts

- 01. Material:Copper alloy
- 02. Surface:hard-silver plated
- 03. Contact resistance :≤1mΩ
- 04. Terminal :Screw terminal
- 05. Wire gauge :1.0-2.5mm² (AWG 18-14)
- 06. Tightening torque :0.5Nm
- 07. Stripping length :7.5mm
- 08. Robs Compliance

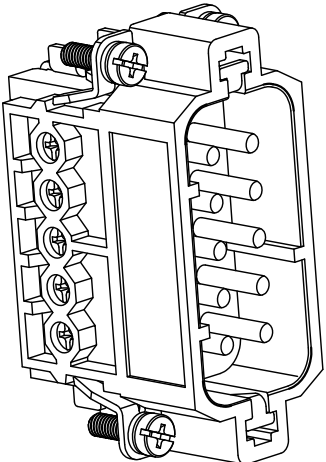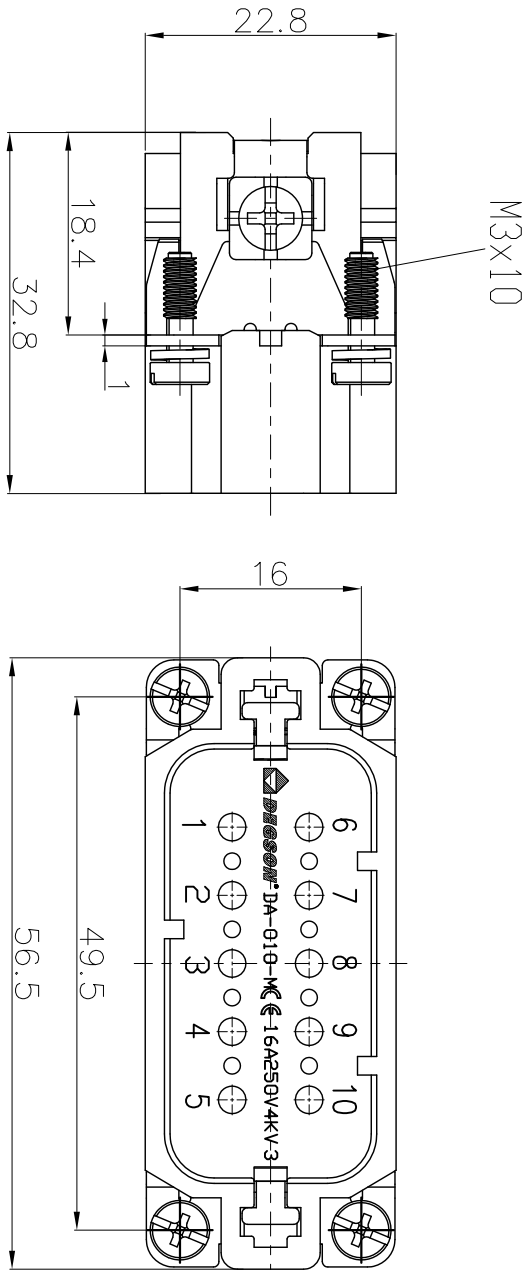

DETACHED LISTS			
PART NO.: DA010M	NAME:  NINGBO DEGSON ELECTRICAL CO.,LTD 宁波高松电子有限公司	REV	DO-1
APPD:	DA-010-M	SHEET	1/1
CHKD:	DA-010-M	SCALE	1.5:1
DFT: Mr. yong 2016.07.25	TITLE: CUSTOMER DRAWING	DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION	DRAWING NO.: DA-010-M-E01		