




## SPECIFICATION OF 18V10W POLY SOLAR MODULE

### PRODUCT SPECIFICATION

Type Of Module		JCN-P10
Maximum Power (W)功率		10
Tolerance (%)正负公差		± 3%
Open Circuit Voltage (V)开路电压		22,5
Maximum Power Voltage (V)工作电压		17,96
Maximum Power Current (A)工作电流		0,56
Short Circuit Current (A)短路电流		0,6
Module Efficiency (%)组件转换率		11,3
Solar Cell Efficiency (%)电池片转换率		17
Series Fuse Rating (A)保险丝等级		5
Terminal Box 接线盒防水等级		IP65
Maximum system voltage (V) 系统耐压		DC1000
Operating Temperature(°C)工作温度范围		-40°C ---85°C

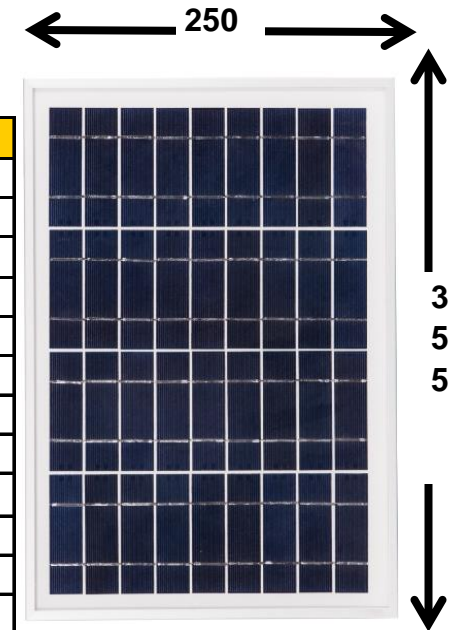

### PRODUCT FEATURE

- Bypass diode minimizes the power drop by shade.
- The conversion efficiency of solar cell is above 17%.
- White tempered glass ,EVA resin,weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
- Waterproof.Perfect for grid applications.
- Product guarantee 5 years.


### Quality Assurance

- Electrical Insulation test
- Outdoor exposure test
- Hot-spot endurance test
- UV-exposure
- Thermal cycling test
- Humidity freeze test
- Damp heat Test
- Robustness of terminations test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test



## Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

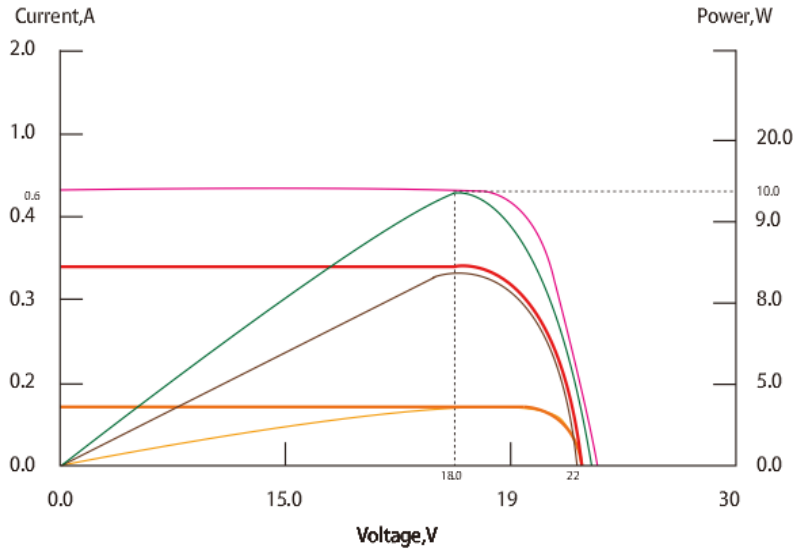

### Electric Performance Typical Performance Characteristics

Short Circuit Current Temperature Coefficient	mA/C	+2.5
Open Circuit Voltage Temperature Coefficient	V/C	-0.147
Maximum Power Temperature Coefficient	%/C	-0.4
Performance Warranty : 90%output , 12 years 80%output , 25 years		

## Physical Specifications

Dimension: 355\*250\*17mm


Weight: 1.1KG/PCS

Packing : pcs in one carton

### Loading Capacity:

pcs/ 20'Container

pcs/ 40' Container

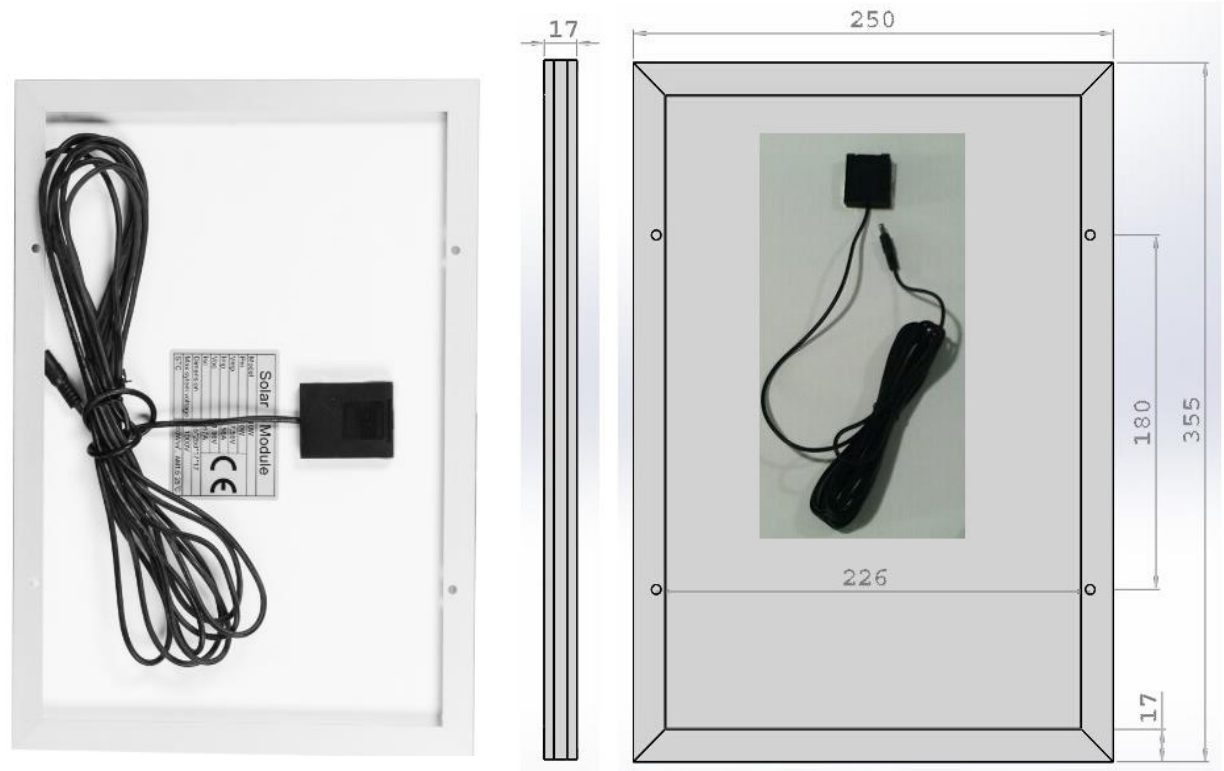

### SHENZHEN JCN NEW ENERGY CO.,LTD.

Add 1: No.5, Dayang Road, 2nd Industry Zone, Yulv community, Gongming Street, Guangming New District, Shenzhen  
Add 2: Buildings 6, CSST Industrial Park, Gongchang Rd., Zhenmei Village, Guangming New District, Shenzhen, Guangdong China

Tel: +86- 755 27094995 -8020

Fax: +86-755 27164829

Website: [www.jcnsolar.com](http://www.jcnsolar.com) [www.jcnsolar.com.cn](http://www.jcnsolar.com.cn) Email: [lucky@jcnsolar.com.cn](mailto:lucky@jcnsolar.com.cn)

